GIANT ATTACHMENTS

Here is a part of our wide range of attachments. The complete range of attachments can be found in the folder "attachments" or on our website www.giant-attachments.com.



WWW.GIANT-ATTACHMENTS.COM

WHEEL LOADERS

in own management in Oisterwijk (the Netherlands). In 2009 TOBROCO-GIANT has started with the development for new models for the existing range. These new models will replace the existing ones. For development TOBROCO-GIANT is using a sophisticated 3-dimentional design program. Thus before taken a machine in production, it's performance can be tested already. During the development of the new models TOBROCO takes care of the demands and needs of their customers. TOBROCO is a specialist in compact wheelloaders. In the modern plant in Holland they build the GIANT wheel loaders. We work with the best suppliers: Kubota, Rexroth. GIANT is robust, durable and quality made in Holland!

Also TOBROCO-GIANT offers you a very big variety of implements. The majority of these implements is designed and produced by TOBROCO-GIANT, and because of this, the implements are optimally adapted for your GIANT, which is more efficient this way.





TOBROCO-GIANT

Industrielaan 2, 5061 KC Oisterwijk (Netherlands) Tel.: +31 (0)13-5211212 Fax: +31 (0)13-5234045

Internet: www.tobroco-giant.com E-Mail: info@tobroco.com







echnical data in this brochure refer to series models that have been tested under operating conditions typical of Central Europe and describe their standard functions. Specifications and their modes of functional well as accessories listed in this brochure depend on the individual model and on the options available with a particular product as well as the statutory requirements of the country of sale. Illustrations used in thur may show products that have not been mentioned or that are not available as series productions machines. The descriptions, illustrations, weights and technical data published herein are non-binding in nature represent the technical status at the time the document went to press. Because of ongoing development, we reserve the right to make changes, without prior notice, to the design, specification, visual appearant technology of our products. Should you require special functions that would be available only by using additional components and/or under special circumstances, please feel free to contact us. We will be happy were any questions you may have and to provide further information regarding whether and under what conditions applying to the product and the target environment such special functions might be feasible. If you earny concerns about the load capacity or operation of our products in certain working conditions or environments, we recommend that you perform a test run under controlled conditions. Despite meticulous attentic etail, we cannot exclude the possibility that our products may not conform to illustrations or stated dimensions, or that errors may have occurred in calculation or during printing, or that the information given here me nocomplete. Consequently, we do not accept liability for the accuracy or completeness of the information supplied in this brochure. All matters relating to our product warranty are contained within our General Term Conditions. We expressly decline to provide additional quarantees. Any liability over and above that our General Term sand Cond



Industrielaan 2, 5061 KC Oisterwijk
Tel.: +31 (0)13-5211212
Fax: +31 (0)13-5234045
Internet: www.tobroco-giant.com
E-Mail: info@tobroco.com



WHEEL LOADERS

A flexible and compact jack of all trades



Pictures may differ from actual product. P001300111 C-SERIE EN V117 D267 - D337T

WHEEL LOADERS

To full fill the needs and demands of her customers TOBROCO offers a wide range of wheel loaders. This range consists out of 25 different types of loaders with a service weight between 1000 kg and 4150 kg. In this leaflet, we will show you the range of GIANT's with a service weight of 2000 kg to 2100 kg. For further information about other types and implements we refer to our other leaflets or our website (www.tobroco-giant.com).










D267 - D337T

These mini wheel loaders are equipped with Kubota diesel engines. With 26 and 33 HP. The machines are equipped with a Bosch Rexroth automotive hydraulic pump which contributes to very smooth and powerful driving characteristics. Heavy axles, four-wheel drive, mechanical driveshaft, and an automatic differential lock mode ensure that the machine can use in his power for maximum results. Strong pivoting articulation, all wheels at all time in contact with the ground and the machine moves with maximum traction.

TECHNICAL SPECIFICATIONS



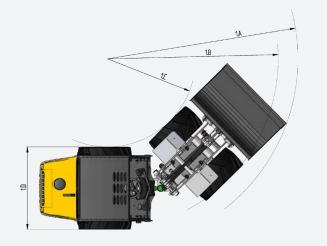



and oil coolers. The engines are mounted on specially de-

signed silent blocks so that vibration and noise level are


reduced to a minimum. In order to increase the comfort GIANT wheel loaders have silent blocks under the driver's platform. With a luxury suspension seat with arm and he-

adrest. This machine gives the luxury that every driver

want. With the standard hydraulic quick-change system is the connecting and disconnecting of the attachments

very easy.



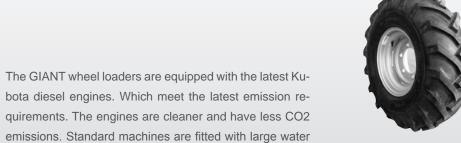











128 cm machine width

31x15.5-15 TR-06 (76x37 cm) 31x15.5-15 Skid (79x40 cm) 131 cm machine width

	D267	D337T	
Engine	3 cylinder Kubota 26 hp / 19 kW	3 cylinder Kubota Turbo 33 hp / 24 kW	
Transmission	Hydraulic 4WD with automotive control, drive shafts	Hydraulic 4WD with automotive control, drive shafts	
Driving speed	0 - 12 km/h	0 - 18 km/h	
Working hydraulics	45 L/min (180 bar)	45 L/min (180 bar)	
Tipping load ¹	1.400 kg	1.450 kg	
Lift capacity	1.600 kg	1.650 kg	
Weight ²	2.000 kg	2.100 kg	
Parking brake	Drum brake / mechanical	Drum brake / mechanical	
Diesel / Oil capacity	37 L / 56 L	37 L / 56 L	
Attachment bracket	GIANT STANDARD Hydraulic	GIANT STANDARD Hydraulic	
Tyres Vehicle width	10.0/75-15.3 AS 1.040 mm	10.0/75-15.3 AS 1.040 mm	

	D267	D337T
s	1.430 kg	1.450 kg
т	1.220 kg	1.250 kg
U	910 kg	950 kg
U (extended lifting arm)	840 kg	880 kg
V	705 kg	745 kg
W	1.975 kg	2.000 kg
х	1.250 kg	1.270 kg
Υ	970 kg	1.000 kg

Sizes in mm. Tippingload in straight position, without extra couterweights. Data is subject to change. ¹ Measured on hinge point in straight position.

² Measured with standard bucket and driver.

		D267	D337T
Α	Wheel base	1.524	1.524
В	Total lenght without bucket	2.986	2.986
С	Total lenght with bucket	3.700	3.700
D	Lenght 3-point lifting arm (option)	622	622
Е	Min height 3 point hitch	134	134
F	Max. height 3 point hitch	797	797
G	Seat height	1.256	1.256
Н	Max. height with ROPS/FOPS safetyroof	2.300	2.300
	Max. height with cabin	2.284	2.284
	Max. Foldable roof (up)	2.348	2.348
	Max. Foldable roof (down)	1.970	1.970
1	Height frontframe	1.480	1.480

J Max. dump bucket

		D267	D337T
K	Max. bucket pin height	2.825	2.825
	max. bucket pin height extended lift arm	2.920	2.920
L	Height with bucket	3.392	3.392
M	Roll back angle ground level	43°	43°
N	Roll back angle	53°	53°
0	Max. dump angle	47°	47°
Р	Max. drive angle	30°	30°
Q	Diameter standaard tyre	Ø 760	Ø 760
1A	Maximum radius	2.635	2.635
1B	Outer turning radius	2.257	2.257
1C	Inner turning radius	1.021	1.021
1D	Total width (vanaf)	1.040	1.040

